



# DUAL 15

## FEATURES AND TECHNICAL SPECIFICATIONS

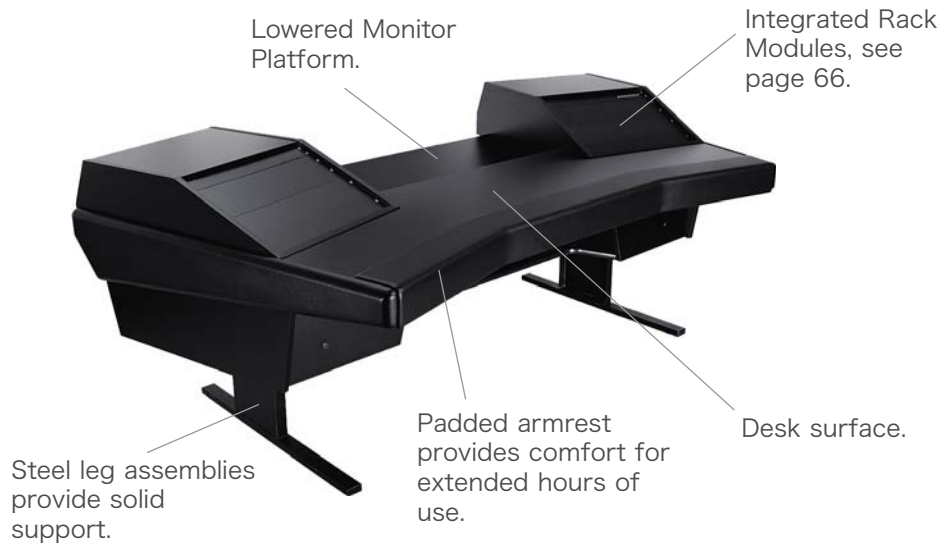

- Designed with two 15 degree angles for a wrap-around feel
- Full Length Padded Armrest (standard Dual 15 models)
- Powder Coated Steel Legs
- Integrated Rack Modules (see page 66)
- Internal Cable Trunking for Wire Management
- Powder Coated Finish on the Upper End Panels

Dual 15 and 15K workstations are shipped disassembled for easy installation. \*Free shipping within the continental United States. Chassis components are made of 19mm and 32mm MDF to provide durability, strength, and density for minimal acoustical influence. Chassis design defeats thermal buildup and permits easy cable access. Enclosed utility area separates, conceals, and protects vital gear and cabling. Optional rack modules provide flexibility to accommodate different system configurations. Patented design.

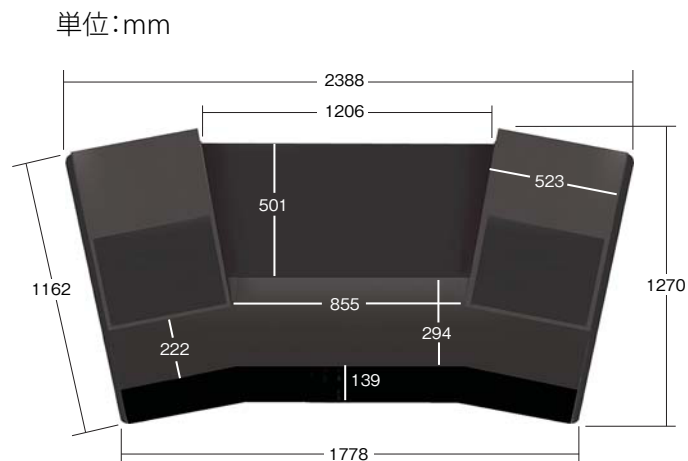


FEATURES AND TECHNICAL SPECIFICATIONS

# DUAL 15K



Dual 15K Classic Model

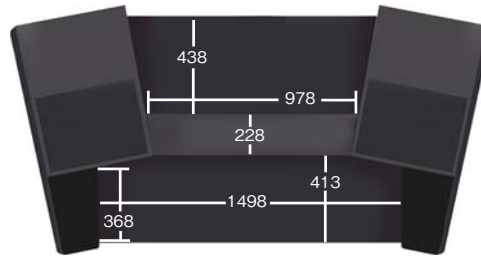

单位:mm

Dual 15-K Dimensions




单位:mm

Dual 15K workstations feature a modified front platform designed to support most popular keyboard controllers - up to 88 note\*.Free shipping within the continental United States.



Dual 15K with MPX Shelf

单位:mm

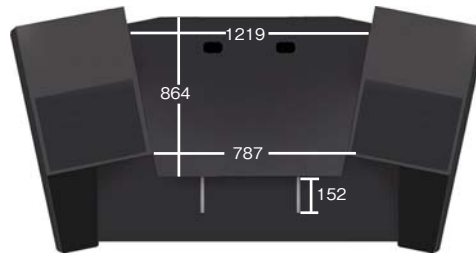

Overall Dimensions: See Dual 15 (previous page).

Dual 15-K with MPX Shelf Dimensions



单位:mm


MPX Height Positions:	1	2	3	4
Dim. (B) Height	114	140	165	190
Usable space between racks*	927	959	990	1022

\* for all rack modules except: DR356 and DR808

# DUAL 15


## FEATURES AND TECHNICAL SPECIFICATIONS

DR800

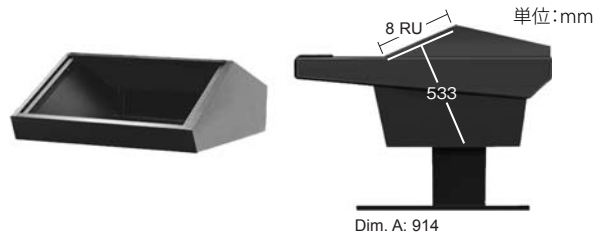


Mastering module designed with angled top to defeat early reflections from speakers. Total 8 RU spaces.

DR847

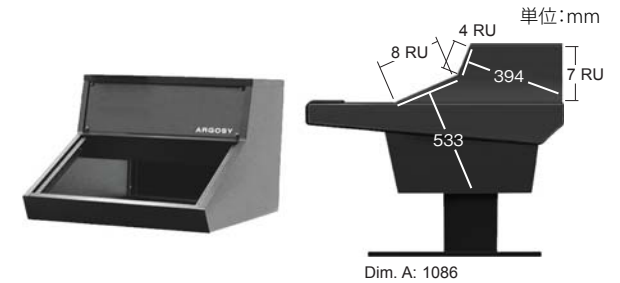


The "original" rack module with a total of 12 RU spaces on the front plus 7 more on the back.

DR803

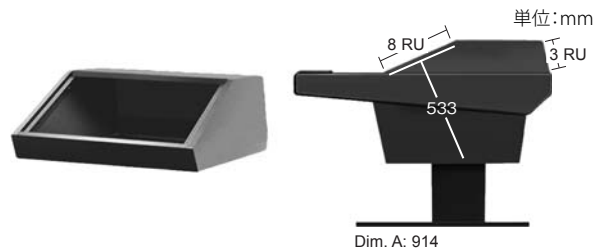


Low profile module with enough flat space on top to place near-field speakers. Features 8 RU spaces in front and 3 RU spaces in back.

DR356

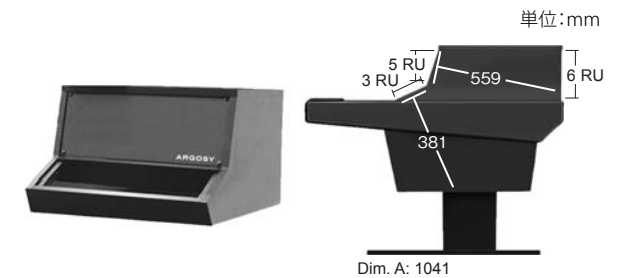


"Radio Rack Module" has 3 RU spaces on the first incline with 5 RU spaces above plus 6 more spaces on the back.

DR825

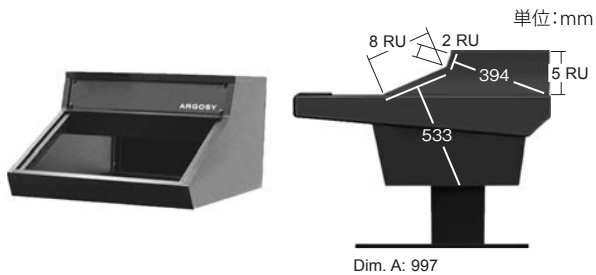


Medium profile module with ample space for near-field speakers and more rack equipment. A total of 10 RU spaces in front and 5 additional spaces in back.

DR808

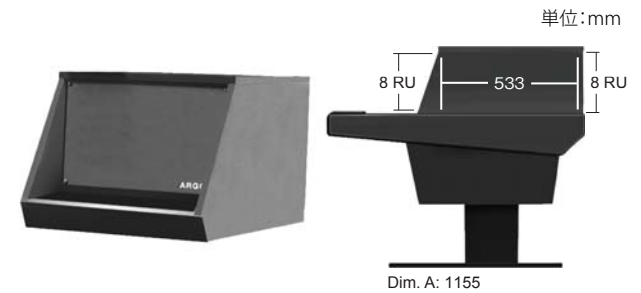


"Video Rack Module" with 8 RU spaces in front and 8 RU spaces in back, set at 21" depth to mount pull-out video decks. Total of 16 spaces.

## Dual 15 workstation w/optional flybridge

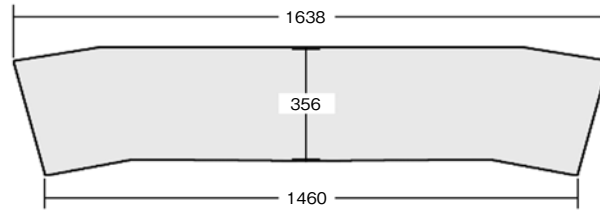

単位:mm

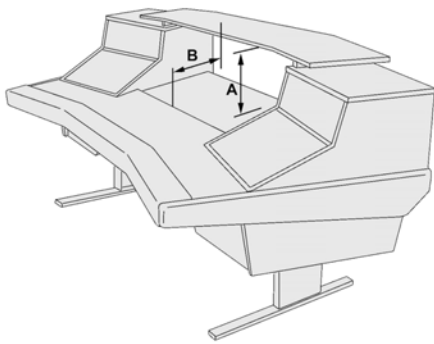


### Dual15

Dimension:

w/module	A	B
DR356	394	228
DR800	na	na
DR803	na	na
DR808	480	228
DR825	350	228
DR847*	437	228

\*illustrated

単位:mm

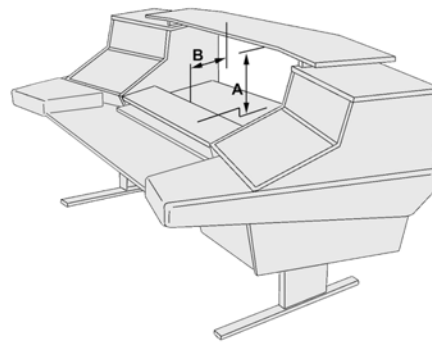


### Dual15K

Dimension:

w/module	A	B
DR356	394	165
DR800	na	na
DR803	na	na
DR808	480	165
DR825	350	165
DR847*	350	165

\*illustrated

単位:mm

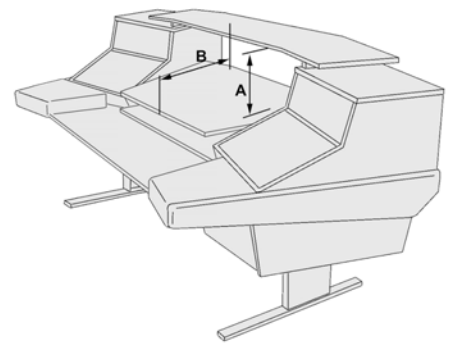

### Dual15K-MPX

Dimension:

w/module	A	B
DR356	197 274	508
DR800	na	na
DR803	na	na
DR808	282 358	508
DR825	152 228	508
DR847*	238 315	508

\*illustrated

単位:mm

Dual15 models are shown with DR847 modules. Different modules effect the height of the flybridge accessory. Dimension: **A** is is the clearance under the flybridge. Dimension: **B** is the dimension between the desk platform/ or shelf and the flybridge. For additional information and illustrations of the different rack modules, see page 66 of the 2003-2004 Argosy product guide.

The MPX shelf is adjustable in height. Dimension: **A** represents the range of clearance under the Dual15 flybridge at the MPX shelf's highest and lowest setting.